

# FC30B

Battery Powered High Capacity Shuttle Car



## High Capacity Freedom<sup>®</sup> Car (30 Tonnes)


*Since its introduction at MINExpo 2000, the Freedom<sup>®</sup> Car has evolved to include an industry leading payload capability, four wheel independent suspension, DC and VFD motor controls, along with improved mechanical and battery components.*



## Increased Payload, Heavy Duty Unibody Chassis & Advanced Wheel Unit Design

- Battery sized to match shuttle car size
- Battery AC inputs available starting at 480 through 1140 Volts – 50 or 60 Hz
- DC or AC motor controls
- DC traction motors 35Hp (26kw) and 50Hp (37kw)
- DC conveyor motors 35Hp (26kw)
- VFD traction motors 75Hp (55kw) and 115Hp (85kw)
- VFD conveyor motors 35Hp (26kw) and 75Hp (55kw)
- Pump motors 14Hp DC (10kw) or 15Hp AC (11kw)
- Halogen lighting with automatic controls
- Conveyor width options: 36" (91.44cm), 40" (101.6cm), 48" (121.92cm), 56" (142.24cm), 64" (162.56cm)
- Conveyor sideboard combinations to match capacity requirements
- Elevating conveyor discharge boom
- Single and dual heavy duty worm gear drives available
- Conveyor discharge time – 30 to 40 seconds
- Grease type take-up mechanism with shims
- Interchangeable planetary type wheel units
- Full time 4-wheel drive / 4-wheel steering
- Electronic traction differential for precise steering
- Tram speed: empty – 6 mph (9.6 Km/h) full – 5.5 mph (8.5 Km/h)
- Automotive type steering draglinks with heavy duty tie rod ends
- Indexed steering components for easy wheel alignment
- Gear type hydraulic pump
- Pressure type and spin-on type filters available
- Injector type oil fill pump
- Hydraulic, fire and lube systems hose ends – JIC, MPT or Staple-Loc
- Dry chemical fire suppression

# Freedom<sup>®</sup> Car FC30B

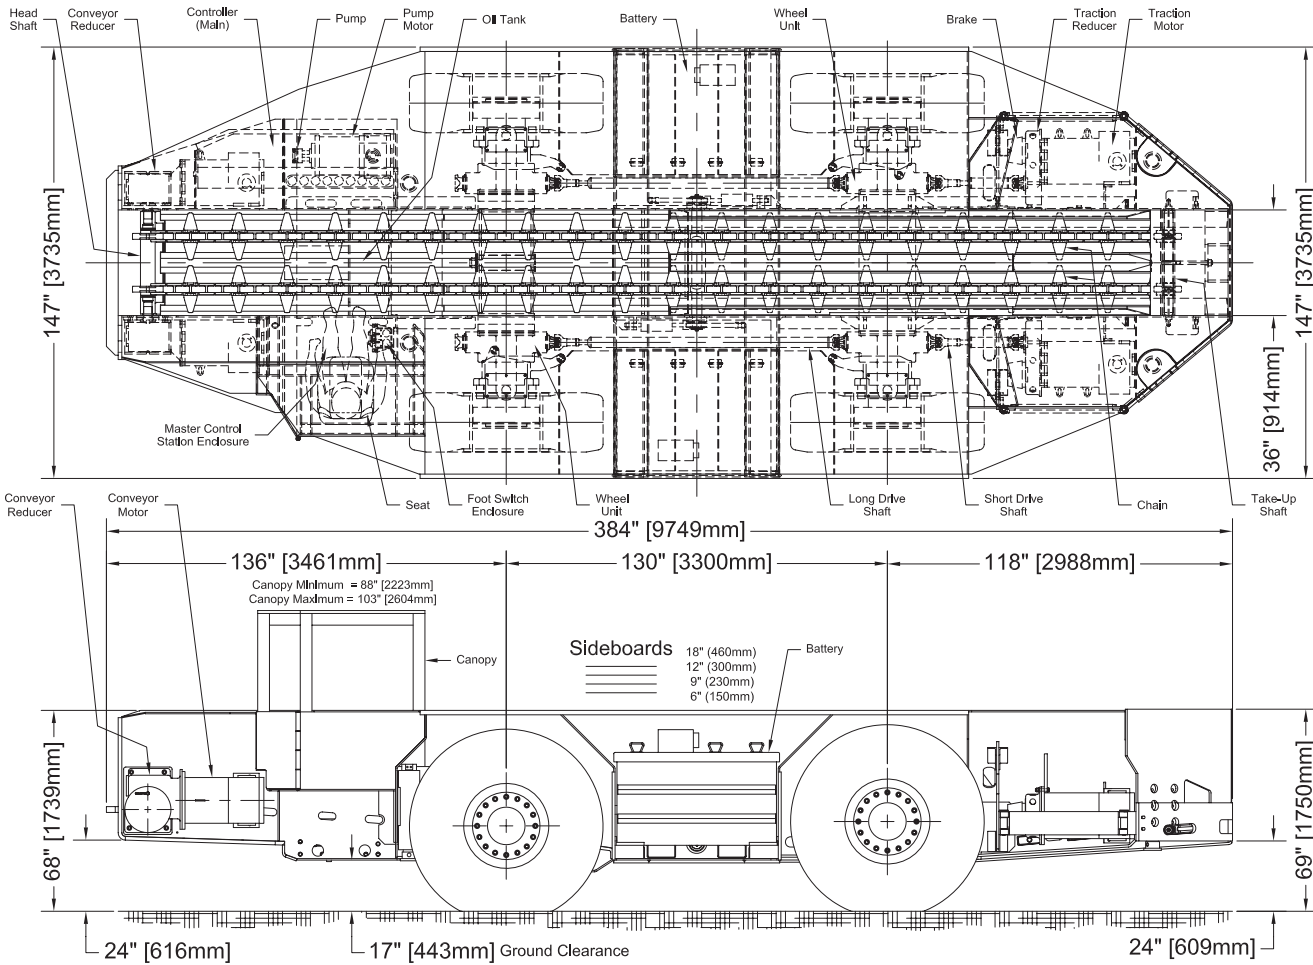

Model	Rated Capacity	Empty Weight	Overall Width (A)	Chassis Width (B)	Overall Length (C)	Chassis Height (D)	Ground Clearance	Tire Size	Load End Height	Ground Pressure	Minimum Seam Height
<b>FC30B</b>	30 Tonnes 33 Tons	394700 kg <sub>1</sub> 87000 lbs <sub>1</sub>	4446mm 175"	4446mm 175"	9648mm 380"	1750mm 67"	436mm 17"	18.00X25	982mm 39.5"	7.73 kg/cm <sup>2</sup> <sub>2</sub> 110 psi <sub>2</sub>	2845mm 112"

All specifications are subject to change without notice.  
Dimensions are based on a Freedom<sup>®</sup> car with a 36" (1625mm) wide conveyor.

Notes:  
<sub>1</sub> Machine weights will vary depending on options selected.  
<sub>2</sub> Ground pressure is shown at rated capacity and will vary depending on options selected.  
<sub>3</sub> When the dual loader chain option is selected, two (2) conveyor motors may be used.

## Key Features

- Variable Speed Tram and Convey
- Liquid Cooling Available for Electronics in Extreme Mining Conditions
- Diagnostic Display Aids in Troubleshooting
- Operator Can Be Located on RH or LH
- Wet Multi-Disc Brake

## Available Options

- Service Cylinders
- 4-Wheel Independent Suspension
- Dual Loader Type Conveyor Chain
- Audio/Visual Safety Device



367 George Street  
Beckley, WV 25801  
+1-800-733-1521  
www.phillipsglobal.us

Phillips Global WV 800-733-1521  
 Phillips Global CO 888-874-9900  
 Phillips Global IL 888-250-1600  
 Phillips Global South Africa +27-13-246-8500

## INTERNATIONAL REPRESENTATION

Australia 0245 736 974  
 China +86 151 3481 2814 / +86 134 7801 4056  
 India +91 97322 79499  
 Russia +7 9057381919